


## CUSTOM RECESSED DIVA INSTALLATION INSTRUCTIONS



**WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING. RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.**

## CUTOUT TABLE



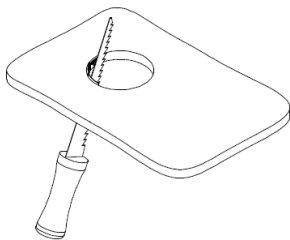


FIXTURE	CUTOUT
CUSTOM DIVA 13 RM 13WX8	121mm X 5950mm / 4.75 X 234.25
CUSTOM DIVA 13 RM 13WX9	121mm X 5950mm / 4.75 X 234.25

**NOTE:** ROUND FRAME INSTALLATION SHOWN, FOLLOW SAME PROCEDURE FOR SQUARE FRAME.

# FIXTURE INSTALLATION

---

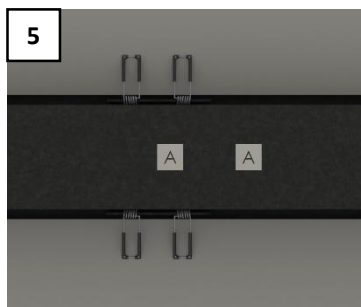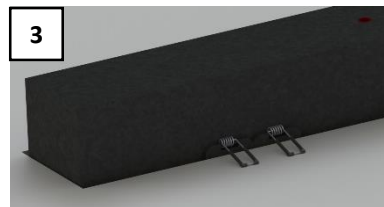

- 
1. CUT AN OPENING IN THE CEILING PER CUTOUT TABLE (FIGURE 1). INSTALL POWER SUPPLIES AND MAKE ELECTRICAL CONNECTIONS. BLACK TO BLACK, WHITE TO WHITE AND GREEN TO GREEN.
  2. IDENTIFY THE MATCHING LABELS ON TOP OF THE FIXTURE. WHEN INSTALLING EACH SECTION THESE LABELS IDENTIFY EACH MATING SIDE. (FIGURE 2)
  3. INSTALL ONE SECTION AT A TIME, STARTING FROM AN EDGE. CONNECT A POWER SUPPLY TO EACH LED MODULE. BLACK TO BLACK, RED TO RED.
  4. AFTER EACH MODULE IN THE SECTION HAVE BEEN CONNECTED, INSTALL IN THE CEILING OPENING USING THE SPRINGS TO SECURE FROM THE TOP OF THE CEILING. (FIGURE 3 AND 4).
  5. MAKE SURE THAT THE LABELS ON THE SIDES OF EACH SECTION MATCH, A-A, B-B, C-C AND D-D. (FIGURE 5)
  6. ORIENT EACH LIGHT ENGINE TO ACHIEVE THE DESIRED LIGHT DISTRIBUTION. PROCEED TO SWITCH POWER ON. (FIGURE 6)