


RECESSED DIVA INSTALLATION INSTRUCTIONS



WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING. RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.




CUTOUT TABLE



NOTE: ROUND FRAME INSTALLATION SHOWN, FOLLOW SAME PROCEDURE FOR SQUARE FRAME.

FIXTURE	CUTOUT
DIVA 2RS	3.35" X 3.7" / 85mm X 94mm
DIVA 2RD	3.35" X 6.69" / 85mm X 170mm
DIVA 2RT	3.35" X 9.69" / 85mm X 246mm
DIVA 2RQ	6.26" X 6.61" / 159mm X 168mm
DIVA 3RS	4.29" X 4.65" / 109mm X 118mm
DIVA 3RD	4.29" X 8.58" / 109mm X 218mm
DIVA 3RT	4.29" X 12.52" / 109mm X 318mm
DIVA 3RQ	8.23" X 8.58" / 209mm X 218mm
DIVA 5RS	6.26" X 6.61" / 159mm X 168mm
DIVA 5RD	6.26" X 12.52" / 159mm X 318mm
DIVA 5RT	6.26" X 18.43" / 159mm X 468mm
DIVA 5RQ	12.17" X 12.52" / 309mm X 318mm

FIXTURE INSTALLATION

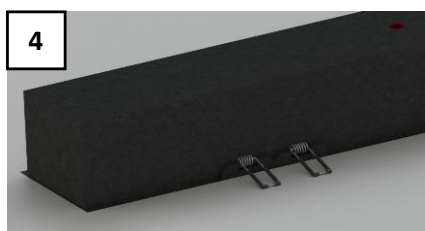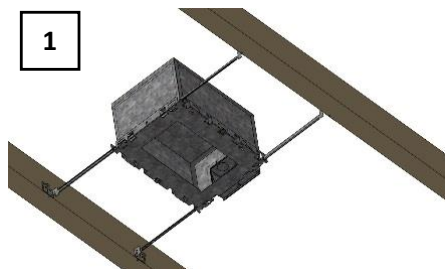

-
1. IF USING AN ENCLOSURE BOX, INSTALL IT USING THE HANGER BARS PROVIDED AND CUT AN OPENING USING THE ENCLOSURE BOX AS A GUIDE.
 - FOR A CLASS 1 ENCLOSURE BOX, RUN CONDUIT TO THE J-BOX ON THE ENCLOSURE AND CONNECT MAIN POWER LINES TO THE POWER SUPPLY. CONNECT THE GROUND TO THE GROUND WIRE ON THE ENCLOSURE, THE NEUTRAL FROM THE POWER SUPPLY TO THE NEUTRAL FROM THE MAIN LINES AND THE HOT FROM THE POWER SUPPLY TO THE HOT FROM THE MAIN LINES. (FIGURE 1)
 - FOR A CLASS 2 ENCLOSURE BOX, RUN CONDUIT TO THE DRIVER RETROFIT. CONNECT THE GROUND TO THE GROUND WIRE ON THE RETROFIT, THE NEUTRAL FROM THE POWER SUPPLY TO THE NEUTRAL FROM THE MAIN LINES AND THE HOT FROM THE POWER SUPPLY TO THE HOT FROM THE MAIN LINES. SEE RETROFIT ENCLOSURE INSTALLATION INSTRUCTIONS FOR FURTHER INFORMATION. (FIGURE 2)
 2. CONNECT THE RED AND BLACK WIRES FROM THE POWER SUPPLY TO THE RED AND BLACK WIRES ON THE FIXTURE USING PROVIDED WAGO CONNECTORS. BLACK TO BLACK, RED TO RED. CONNECT EACH GIMBLE, OR SET OF GIMBLES WITH A PAIR OF WIRE CONNECTIONS TO EACH POWER UNIT. (CABLES SHOWN IN FIGURE 2, CONNECTORS FIGURE 3)
 3. INSTALL THE FIXTURE IN THE CEILING USING THE SPRINGS TO SECURE IT IN PLACE. (FIGURE 4).
 4. ORIENT EACH LIGHT ENGINE TO ACHIEVE THE DESIRED LIGHT DISTRIBUTION. PROCEED TO SWITCH POWER ON. (FIGURE 6)

FIXTURE INSTALLATION

FIXTURE	DRIVER LOCATION	DRIVER QUANTITY	DRIVER SPECIFICATIONS
DIVA 2RS	J-BOX ON BOARD	1	700 mA 7W
DIVA 2RD	J-BOX ON BOARD	1	700 mA 14W
DIVA 2RT	J-BOX ON BOARD	1	700 mA 22W
DIVA 2RQ	J-BOX ON BOARD	1	700 mA 28W
DIVA 3RS	J-BOX ON BOARD	1	350 mA 13W
DIVA 3RD	J-BOX ON BOARD	1	700 mA 28W
DIVA 3RT	J-BOX ON BOARD	3	350 mA 13W
DIVA 3RQ	J-BOX ON BOARD	2	700 mA 28W
DIVA 5RS	J-BOX ON BOARD	1	700 mA 28W
DIVA 5RD	J-BOX ON BOARD	2	700 mA 28W
DIVA 5RT	J-BOX ON BOARD	3	700 mA 28W
DIVA 5RQ	J-BOX ON BOARD	4	700 mA 28W