




PROJECT	
TYPE	
CONTACT	

3" 1058lm Pendant | Round | Adjustable

Bongo 3 PD

This Zaniboni Fixture comes available in over 1000 customizable configurations for your specification.

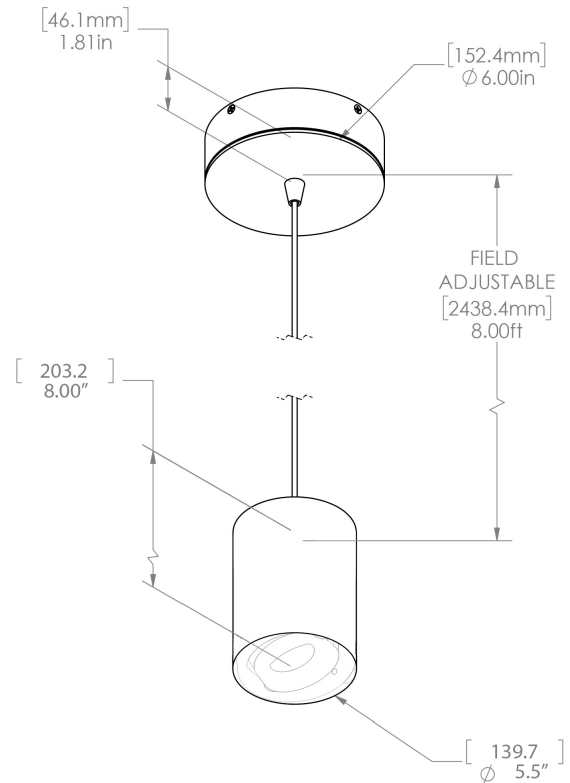


Performance Options

	9W	13W
Source Lumens	1158 lm	1524 lm
Delivered Lumens	603 lm	1058 lm
Lumens / Watt	67 lm/W	81 lm/W
Current	250mA	350mA


CCT / CRI Multiplier

	2700°K	3000°K	3500°K	4000°K
80 CRI	0.93	1.00	1.00	1.07
95 CRI	0.69	0.75	0.81	0.87

1900 Lux @ 1 m



Lumen 1058



LUMENS: DELIVERED AT STABILIZED OPERATINGTEMPERATURE

How To Specify Use The Fixture Options Below to Fill In Each Box To Build Your Final Product Code

▼Family	▼Name	▼Source	▼Optics	▼Finish	▼Elec.	▼Encl. & IP				
P3	B03PD	13	3		000					
OPTICS	MODEL	TOTAL WATT	KELVINTEMP	CRI	BEAM	EFFECT	COLOR	DRIVER	HOUSING	IP
P3: 3"	B03PD: Bongo 3 PD		27: 2700° 30: 3000° 35: 3500° 40: 4000°	A: 80 B: 95	1: 15° 2: 24° 3: 36° 4: 45° 6: 60°	C: Clear F: Frosted (No charge) P: Prismatic (Shatterproof) S: Solite	WS: Matte White WS: Matt White BK: Matte Black CC: Custom Color	0: No Driver Z: 0-10V Dimmable E: ELV Dimmable L: Lutron™ Hi-Lum (3-wire) T: Lutron™ Hi-Lum (2-wire) N: Non-Dimmable A: 0-10V Dimmable +EM Backup F: ELV Dimmable +EM Backup M: Lutron™ Hi-Lum (3-wire) +EM Backup U: Lutron™ Hi-Lum (2-wire) +EM Backup P: Non-Dimmable +EM Backup	0: No Enclosure R: Retro-Fit Enclosure R: Retro-Fit Mini	D: Dry

Generated on Wednesday September 28th 2016

Specifications

This Specification Grade LED downlight offers a wide selection of LED module options to address design requirements in the spaces it illuminates. Many additional custom options are available; please contact manufacturer for details.

LED source

Tool-free field-replaceable LED module. Proprietary high performance aluminum die cast heatsink for maximum LED life.

Optics

Computer-optimized reflector design. High reflectance finished aluminum. Tool-free field-interchangeable reflectors and lens. 0-20° (O version), 0-40° (J version) vertical and 360° horizontal adjustment.

Body

Die-cast aluminum frame and body

Trim

Die-cast aluminum CNC machine finished. Minimal thickness. White can be field painted to match adjacent finishes

Fixture retention

Two torsion springs hold the fixture tight to the ceiling accommodating ceiling thickness from 1/16" to 1". Special springs for thicker ceiling available on request.

Life

Rated for 50,000 hours at 70% lumen maintenance.

Labels

ETL listed for US and Canada. CE labeled. CCC label available on request.

Warranty


5 years limited warranty.

Wet location (if option is available and selected on page 1)

Sealed lens and integral silicon gasket behind the trim.


Dimming Compatibility

ZANIBONI fixtures are compatible with all major dimming protocols in the industry. Please refer to www.zanibonilighting.com for general compatibility and wiring diagrams. ZANIBONI recommends testing your unique dimming configuration as the exact full configuration (Dimmer, drivers, fixture quantities, voltage) may affect dimming performance.

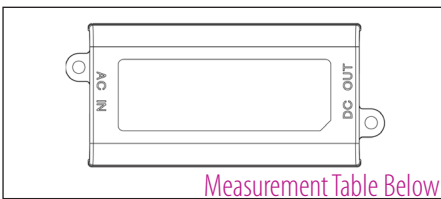


N: Non-Dimmable

- 110-277 V, 50/60Hz.
- Economic solution for ON-OFF applications not requiring dimming.

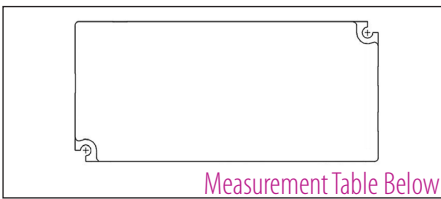


E: ELV Dimmable

- 110-277 V, 50/60Hz.
- For ELV (Electronic Low Voltage) dimmers. Best for new construction applications. Dims down to less than 10% light output (most cases). Consult dimming manufacturer for installation instructions. Must meet dimmer Minimum Load Requirements.

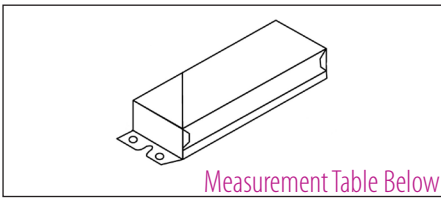


Z: 0-10V Dimmable

- 110-277 V, 50/60Hz.
- Prevalent solution on commercial projects. Integrates into a variety of building management and daylighting controls. Dims down to less than 10% light output (most cases). Must meet dimmer Minimum Load Requirements. Consult dimming manufacturer for installation instructions.

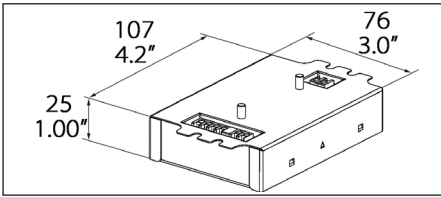

L: Lutron Hi-Lume A L3D

- 120-277 V, 50/60Hz
- For 3-wire LUTRON dimming systems. Continuous dimming to 1%.
- Consult dimming manufacturer for installation instructions.

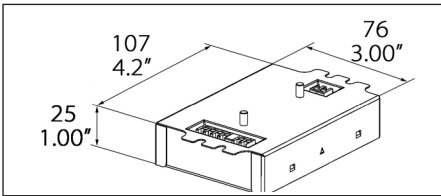

T: Lutron Hi-Lume A LTE

- 120 V, 50/60Hz.
- For 2-wire Forward Phase Controls. Continuous dimming to 1%.
- Consult dimming manufacturer for installation instructions.

N & E: Non-Dimmable & ELV Drivers

MEASUREMENTS	LWH IN MM	LWH IN INCHES
7W, 9W, 13W	85.5*38*27.7	3.36"*1.49"*1.09"
18W, 26W	89*41*31.5	3.5"*1.62"*1.24"
36W, 50W	89*41*31.5	3.5"*1.62"*1.24"

Z: 0-10V Dimmable

MEASUREMENTS	LWH IN MM	LWH IN INCHES
7W, 9W	85.3*38*27.7	3.36"*1.49"*1.09"
13W, 18W	89*41*31.5	3.5"*1.62"*1.24"
26W, 36W, 50W	138*47*32	5.43"*1.85"*1.25"